

RADIATOR VALVE PACKS

Our radiator valve packs provide a total radiator solution. Included in each pack is one TRV and one lockshield valve. There are a range of packs available depending on individual requirements, with PETITE, pushfit and decorative options. We also offer a selection of radiator packs with drain off valves.

GENERAL SPECIFICATION

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Pressure tested in accordance with BS 2767.
 - GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
 - COLOUR**
Finished in nickel (PETITE) and chrome (Radpak).
 - CONNECTIONS**
Compression.
 - OPERATING PRESSURES**
Tested to a maximum pressure of 10 bar (compression), 3 bar (pushfit).
 - OPERATING TEMPERATURE**
Maximum 120°C (compression), 92°C (pushfit).
 - DELIVERY**
2 - 5 working days.
- For more general information, please see page 276.

PETITE PUSHFIT PACKS


| Description | Order Code | Minimum Order Qty |
|--|----------------|-------------------|
| PETITE Pushfit 10mm Radpak TRV & Euro Lockshield in one pack (90° Pushfit Elbow) | PETPAK10NPF90 | 10 |
| PETITE Pushfit 10mm Radpak TRV & Euro Lockshield Drain Off in one pack (90° Pushfit Elbow) | PETPAK10NDPF90 | 10 |

TRV & LOCKSHIELD VALVE PACKS

| | | |
|---|------------|----|
| PETITE Radpak 10mm PETITE TRV & Euro Lockshield in one pack | PETPAK10N | 10 |
| PETITE Radpak 10mm PETITE TRV & Euro Lockshield Drain Off in one pack | PETPAK10ND | 10 |
| PETITE Radpak 15mm PETITE TRV & Euro Lockshield in one pack | PETPAK15N | 10 |
| PETITE Radpak 15mm PETITE TRV & Euro Lockshield Drain off in one pack | PETPAK15ND | 10 |
| PETITE Radpak Straight 15mm PETITE TRV & Euro Lockshield in one pack | PETPAK15NS | 1 |
| Radpak 10/15mm TRV 2-WAY & MATCHMASTER Lockshield in one pack | RADPACK | 1 |

DECORATIVE CHROME TRV & LOCKSHIELD VALVE PACKS

| | | |
|--|--------------|---|
| All chrome Angle PETITE TRV & Lockshield Valve Pack | PETPAK15DEC | 1 |
| All chrome Straight PETITE TRV & Lockshield Valve Pack | PETPAK15DECS | 1 |

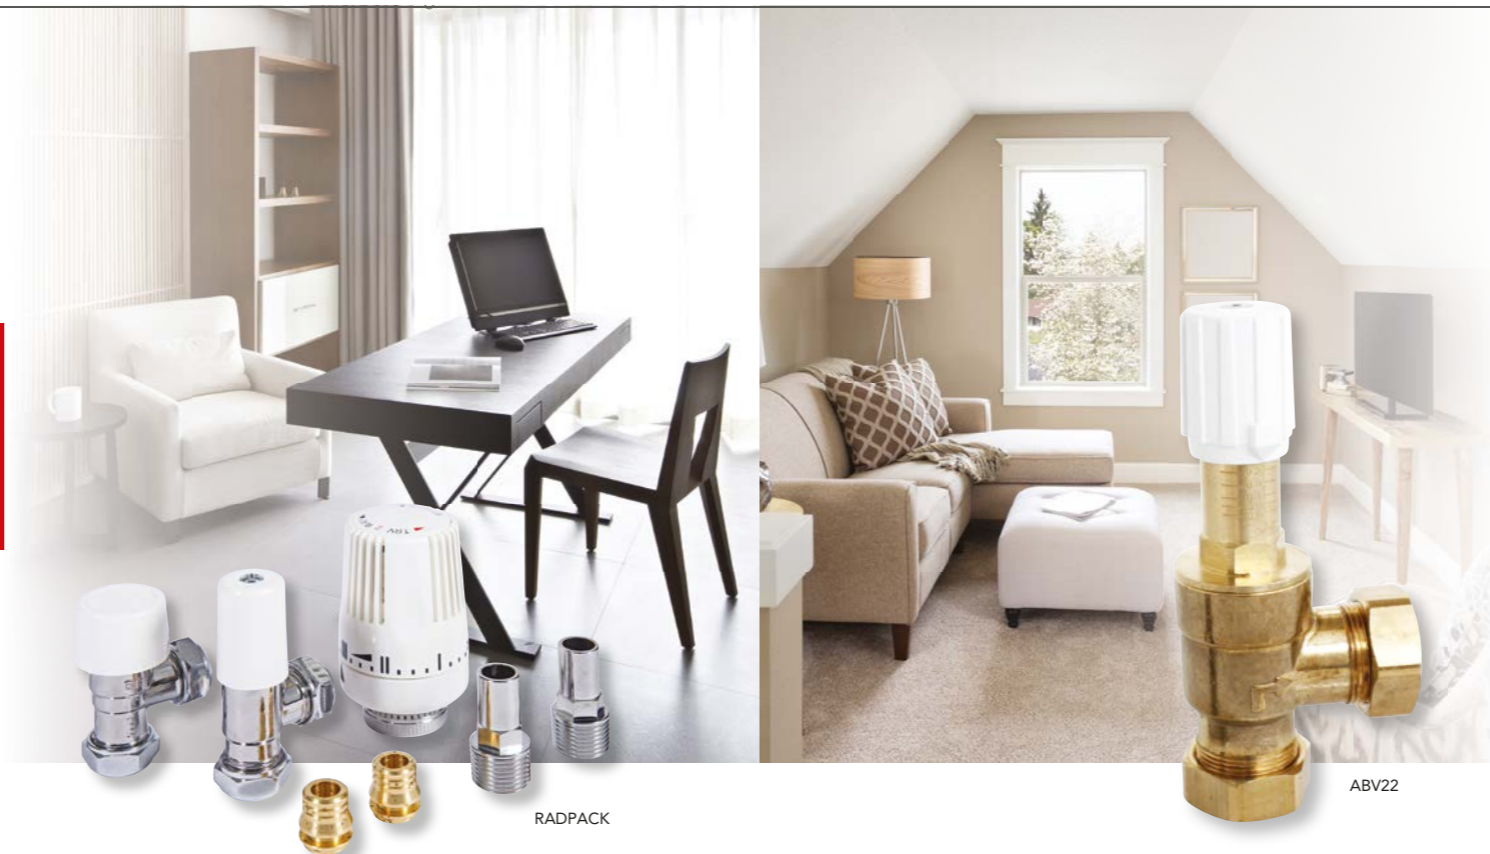

AUTOMATIC BYPASS VALVES

MYSON offer a selection of Automatic Bypass Valves (ABVs). Our automatic bypass valves are designed for use in domestic central heating systems and are available in either an angled or straight version. Its purpose is to maintain constant pump pressure and flow rate within the system. ABVs also reduce system noise and increase efficiency.


GENERAL SPECIFICATION

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Pressure tested in accordance with BS 2767.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in brass.
- CONNECTIONS**
Compression.
- OPERATING PRESSURES**
Tested to a maximum pressure of 10 bar.
- OPERATING TEMPERATURE**
Maximum 120°C.
- DELIVERY**
2 - 5 working days.


For more general information, please see page 276.

DIMENSIONS

Automatic Bypass Valve Angle



Automatic Bypass Valve Straight



NB: All measurements are nominal.

| Description | Metal Finish | Order Code | Minimum Order Qty |
|---------------------------------|--------------|------------|-------------------|
| Automatic Bypass Valve Angle | Brass | ABV22 | 1 |
| Automatic Bypass Valve Straight | Brass | ABV22S | 1 |